

12.3 Dimensional drawings

In this chapter you can find the dimensions of the geared motors.

There is a dimensional drawing for every possible shaft/housing design, each with the tables for gear unit dimensions, motor dimensions and geared motor dimensions.


Dimensions can exceed the specifications of ISO 2768-mK due to casting tolerances or accumulation of individual tolerances.

We reserve the right to make dimensional changes due to ongoing technical development.

You can download 3D models of our standard drives at <https://configurator.stoeber.de/en-US/>.

Combination options and the dimensions of forced ventilated geared motors can also be found at <https://configurator.stoeber.de/en-US/>.

12.3.1 F shaft design (flange shaft)

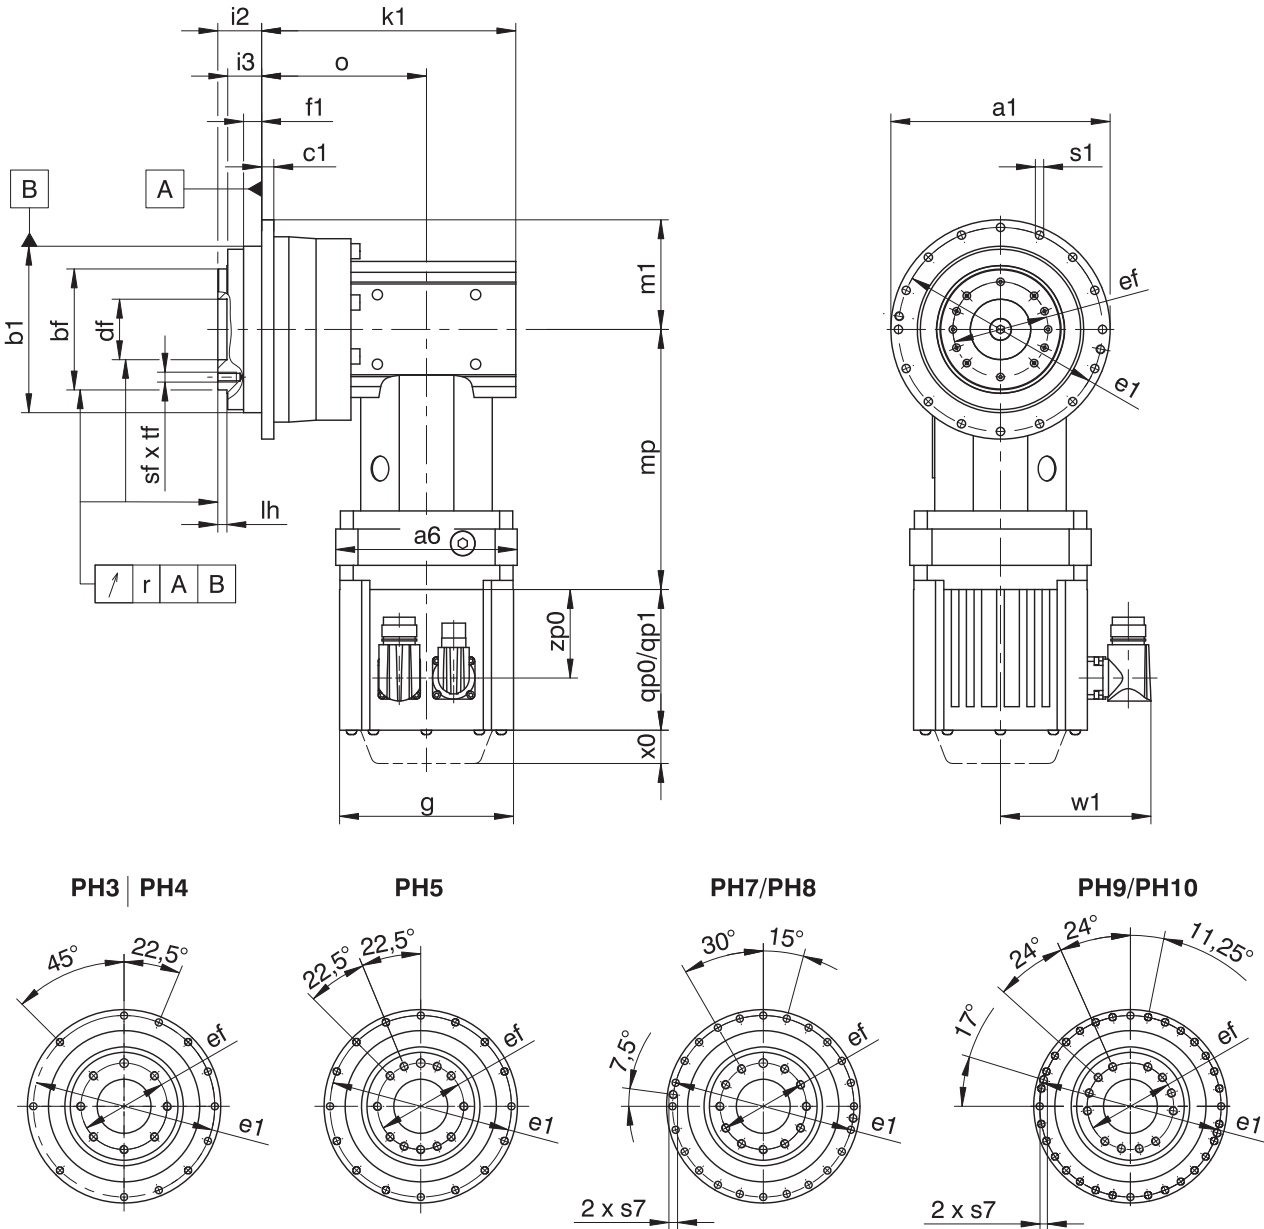

- qp0
Applies to motors without brake.
- x0
Applies to encoders using an optical measuring method
- qp1
Applies to motors with brake.
- w1
Different for the One Cable Solution (OCS), see the chapter [17.4](#)

Dimensions of gear units

| Type | Øa1 | Øb1 | Øbf | c1 | Ødf | Øe1 | Øef | f1 | i2 | i3 | k1 | lh | m1 | o | r | Øs1 | s7 | sf | tf |
|---------------|-------------------|-------------------|-------------------|----|--------------------|-----|-----|----|------|------|-------|----|-------|-------|-------|------|-----|-----|----|
| PH331_KX301_ | 86 _{h7} | 64 _{h7} | 40 _{h7} | 4 | 20.0 ^{H6} | 79 | 32 | 7 | 19.5 | 16.5 | 113.5 | 4 | 43.0 | 73.5 | 0.020 | 4.5 | – | M5 | 7 |
| PH332_KX301_ | 86 _{h7} | 64 _{h7} | 40 _{h7} | 4 | 20.0 ^{H6} | 79 | 32 | 7 | 19.5 | 16.5 | 147.0 | 4 | 43.0 | 107.0 | 0.020 | 4.5 | – | M5 | 7 |
| PH431_KX401_ | 118 _{h7} | 90 _{h7} | 63 _{h7} | 7 | 31.5 ^{H6} | 109 | 50 | 10 | 30.0 | 24.0 | 139.0 | 6 | 59.0 | 89.0 | 0.020 | 5.5 | – | M6 | 11 |
| PH432_KX301_ | 118 _{h7} | 90 _{h7} | 63 _{h7} | 7 | 31.5 ^{H6} | 109 | 50 | 10 | 30.0 | 24.0 | 161.5 | 6 | 59.0 | 121.5 | 0.020 | 5.5 | – | M6 | 11 |
| PH531_KX501_ | 145 _{h7} | 110 _{h7} | 80 _{h7} | 8 | 40.0 ^{H6} | 135 | 63 | 12 | 29.0 | 23.0 | 168.0 | 6 | 72.5 | 109.0 | 0.020 | 5.5 | – | M6 | 11 |
| PH532_KX401_ | 145 _{h7} | 110 _{h7} | 80 _{h7} | 8 | 40.0 ^{H6} | 135 | 63 | 12 | 29.0 | 23.0 | 187.5 | 6 | 72.5 | 137.5 | 0.020 | 5.5 | – | M6 | 11 |
| PH731_KX701_ | 179 _{h7} | 140 _{h7} | 100 _{h7} | 10 | 50.0 ^{H6} | 168 | 80 | 12 | 38.0 | 32.0 | 203.0 | 6 | 89.5 | 129.0 | 0.025 | 6.6 | – | M8 | 14 |
| PH732_KX501_ | 179 _{h7} | 140 _{h7} | 100 _{h7} | 10 | 50.0 ^{H6} | 168 | 80 | 12 | 38.0 | 32.0 | 226.0 | 6 | 89.5 | 167.0 | 0.025 | 6.6 | – | M8 | 14 |
| PH831_KX701_ | 247 _{h7} | 200 _{h7} | 160 _{h7} | 12 | 80.0 ^{H6} | 233 | 125 | 15 | 50.0 | 42.0 | 235.5 | 8 | 123.5 | 161.5 | 0.030 | 9.0 | M10 | M10 | 18 |
| PH832_KX701_ | 247 _{h7} | 200 _{h7} | 160 _{h7} | 12 | 80.0 ^{H6} | 233 | 125 | 15 | 50.0 | 42.0 | 293.0 | 8 | 123.5 | 219.0 | 0.030 | 9.0 | M10 | M10 | 18 |
| PH942_KX701_ | 300 | 255 _{h7} | 180 _{h7} | 18 | 90.0 ^{H6} | 280 | 140 | 20 | 66.0 | 55.0 | 336.0 | 12 | 150.0 | 262.0 | 0.030 | 13.5 | M8 | M16 | 24 |
| PH1042_KX701_ | 330 | 285 _{h7} | 200 _{h7} | 20 | 95.0 ^{H6} | 310 | 160 | 20 | 75.0 | 60.0 | 343.0 | 10 | 165.0 | 269.0 | 0.040 | 13.5 | M10 | M20 | 28 |

Dimensions of motors

| Type | □g | qp0 | qp1 | w1 | x0 | zp0 |
|--------|-----|-----|-------|-------|----|-------|
| EZ301U | 72 | 90 | 130.0 | 55.5 | 21 | 54.5 |
| EZ302U | 72 | 112 | 152.0 | 55.5 | 21 | 76.5 |
| EZ303U | 72 | 134 | 174.0 | 55.5 | 21 | 98.5 |
| EZ401U | 98 | 98 | 146.5 | 91.0 | 22 | 56.0 |
| EZ402U | 98 | 123 | 171.5 | 91.0 | 22 | 81.0 |
| EZ404U | 98 | 173 | 221.5 | 91.0 | 22 | 131.0 |
| EZ501U | 115 | 93 | 147.5 | 100.0 | 22 | 58.5 |
| EZ502U | 115 | 118 | 172.5 | 100.0 | 22 | 83.5 |
| EZ503U | 115 | 143 | 197.5 | 100.0 | 22 | 108.5 |
| EZ505U | 115 | 193 | 247.5 | 100.0 | 22 | 158.5 |
| EZ701U | 145 | 102 | 161.0 | 115.0 | 22 | 64.0 |
| EZ702U | 145 | 127 | 186.0 | 115.0 | 22 | 89.0 |
| EZ703U | 145 | 152 | 211.0 | 115.0 | 22 | 114.0 |
| EZ705U | 145 | 207 | 266.0 | 134.0 | 22 | 165.0 |
| EZ802U | 190 | 197 | 274.0 | 156.5 | 22 | 143.0 |
| EZ803U | 190 | 238 | 315.0 | 156.5 | 22 | 184.0 |
| EZ805U | 190 | 320 | 397.0 | 156.5 | 22 | 266.0 |

Dimensions of geared motors

| Type | EZ3 | | EZ4 | | EZ5 | | EZ7 | | EZ8 | |
|---------------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|
| | □a6 | mp | □a6 | mp | □a6 | mp | □a6 | mp | □a6 | mp |
| PH331_KX301_ | 75 | 139.5 | 100 | 134.0 | — | — | — | — | — | — |
| PH332_KX301_ | 75 | 139.5 | — | — | — | — | — | — | — | — |
| PH431_KX401_ | 100 | 151.0 | 100 | 145.5 | 115 | 150.0 | 140 | 153.0 | — | — |
| PH432_KX301_ | 75 | 139.5 | 100 | 134.0 | — | — | — | — | — | — |
| PH531_KX501_ | — | — | 120 | 176.5 | 120 | 172.0 | 140 | 183.0 | — | — |
| PH532_KX401_ | 100 | 151.0 | 100 | 145.5 | 115 | 150.0 | 140 | 153.0 | — | — |
| PH731_KX701_ | — | — | — | — | 150 | 214.5 | 150 | 217.5 | 190 | 242.5 |
| PH732_KX501_ | — | — | 120 | 176.5 | 120 | 172.0 | 140 | 183.0 | — | — |
| PH831_KX701_ | — | — | — | — | 150 | 214.5 | 150 | 217.5 | 190 | 242.5 |
| PH832_KX701_ | — | — | — | — | 150 | 214.5 | 150 | 217.5 | 190 | 242.5 |
| PH942_KX701_ | — | — | — | — | 150 | 214.5 | 150 | 217.5 | 190 | 242.5 |
| PH1042_KX701_ | — | — | — | — | 150 | 214.5 | 150 | 217.5 | 190 | 242.5 |

12.4 Type designation

This chapter shows you an explanation of the type designation with the associated options.
Additional ordering information not included in the type designation can be found at the end of the chapter.

Example code

| | | | | | | | | | | | | |
|----|---|---|---|---|---|---|---|------|---------|------|----|--------|
| PH | 7 | 3 | 1 | S | F | S | S | 0050 | KX701VF | 0010 | MF | EZ703U |
|----|---|---|---|---|---|---|---|------|---------|------|----|--------|

Explanation

| Code | Designation | Design |
|-------------|--|--|
| PH | Type | Planetary gear unit |
| 7 | Size | 7 (example) |
| 3 | Generation | Generation 3 |
| 4 | | Generation 4 |
| 1 | Stages | Single-stage |
| 2 | | Two-stage |
| S | Housing | Standard |
| F | Shaft | Flange shaft |
| S | Bearing | Standard bearing |
| V | | Reinforced bearing (PH3 – PH5) |
| S | Backlash | Standard |
| R | | Reduced (PH3 – PH9) |
| 0050 | Transmission ratio of output (i x 10) | i = 5 (example) |
| KX701 VF | Input | KX7 right-angle geared motor (example) |
| 0010 | Transmission ratio of input (i x 10) | i = 1 (example) |
| MF | Motor adapter | Motor adapter with FlexiAdapt coupling |
| EZ703U | Motor | EZ synchronous servo motor |

To complete the type designation, also specify the following in your order:


- A detailed type designation of the motor, see the chapter [▶ 17](#)
- Mounting position, see the chapter [▶ 12.5.3](#)
- Radial shaft seal rings at the output made of NBR or FKM (option), see the chapter [▶ 12.6.3](#)
- Position of the plug connectors, see the chapter [▶ 12.5.5](#)
- For reverse operation of the output shaft from ±20° to ±90° and horizontal installation, note the chapter [▶ 12.6.4](#)

12.4.1 Nameplate

An example geared motor nameplate is explained in the figure below.


1

2



STÖBER Antriebstechnik GmbH + Co. KG
Kieselbronner Str. 12, 75177 Pforzheim, DE
P332SPSS0400EZ301U
i=40,000; ; HC 150; 0,08 l
SN: 10430585 CD:

19/42



3

4

5

6

7

8

9

| Code | Designation |
|------|--|
| 1 | Name of manufacturer |
| 2 | Type designation |
| 3 | Gear ratio of the gear unit |
| 4 | Serial number of the gear unit |
| 5 | Lubricant specification |
| 6 | Customer-specific data |
| 7 | Lubricant fill volume |
| 8 | Date of manufacture (year/calendar week) |
| 9 | QR code (link to product information) |

12.4.1.1 Supporting documents

You can view or download supporting documents for the product by reading off the serial number on the nameplate of the product and entering it at the following address online:
<https://id.stober.com>

Alternatively, you can use a suitable mobile device to scan in the QR code on the nameplate of the product in order to be linked to the supporting documents.

12.5 Product description

12.5.1 Input options

EZ synchronous servo motor



Catalog ID 442437_en

The corresponding catalogs can be found at <http://www.stoeber.de/en/downloads/>
Enter the ID of the catalog in the Search term field.


12.5.2 Installation conditions

- The torque and force values listed in this catalog are valid under the following conditions:
- When the flange shaft and gear housing are fastened on the machine side using screws of strength class 12.9
 - When the gear housings are adjusted at pilot $\varnothing b1$. The machine-side fit must be H7.
 - When the flange shaft is adjusted using the connecting element at pilot $\varnothing bf$ or $\varnothing df$

12.5.3 Mounting positions

The following table shows the standard mounting positions.

The numbers identify the gear unit sides. The mounting position is defined by the gear side facing downwards.

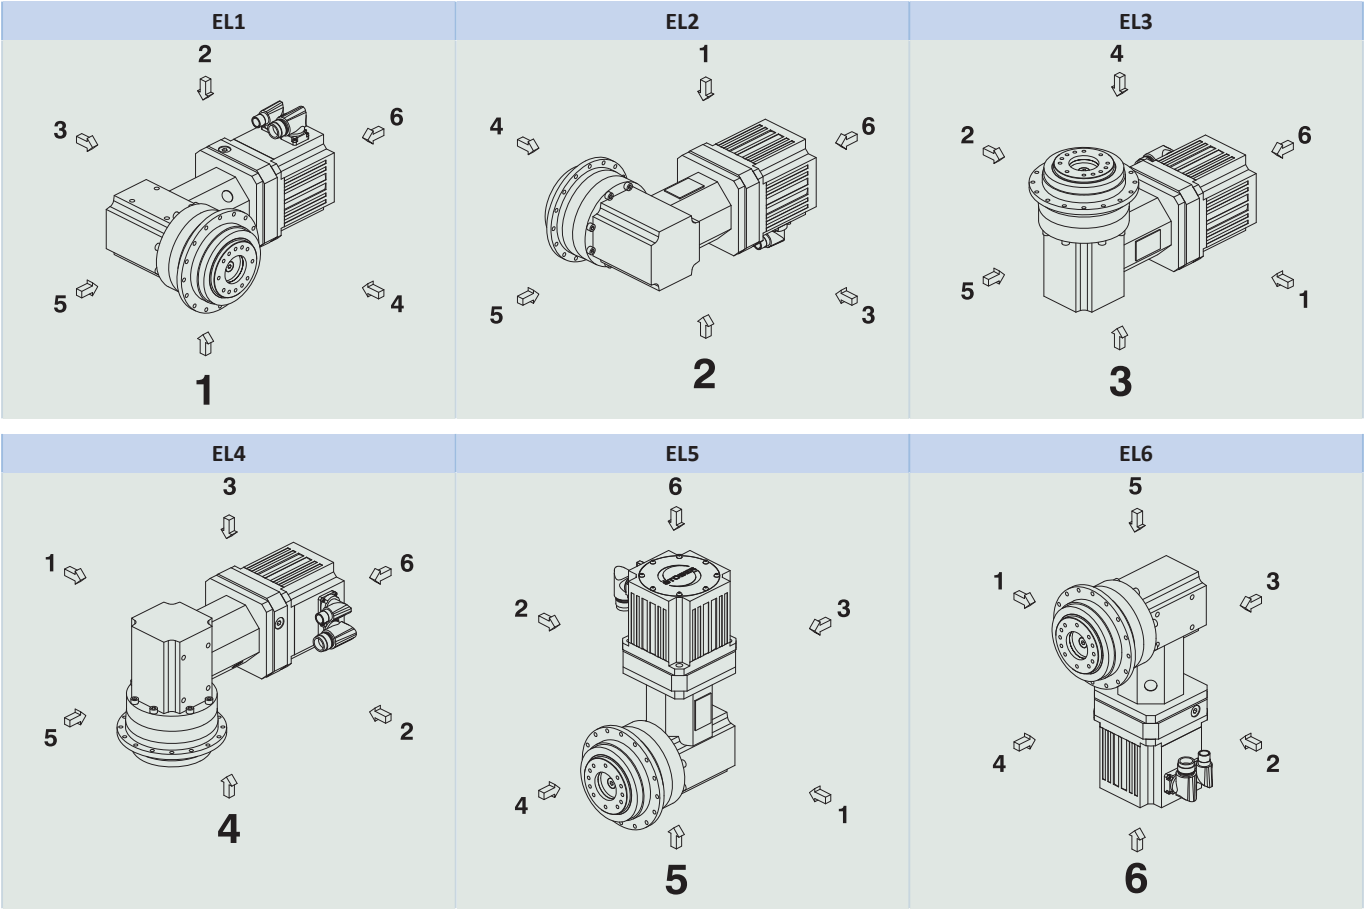

Since the lubricant filling volume of the gear unit depends on the mounting position, the mounting position must be specified when ordering.


12.5.4 Lubricants

STOBER fills the gear units with the amount and type of lubricant specified on the nameplate. The filling volume and the structure of the gear units depend on the mounting position.

Only install the gear units in the intended mounting position! Reposition the gear units only after consulting STOBER. Otherwise, STOBER assumes no liability for the gear units.

You will receive lubricants for use in the food industry upon request.

12.5.5 Position of the plug connectors

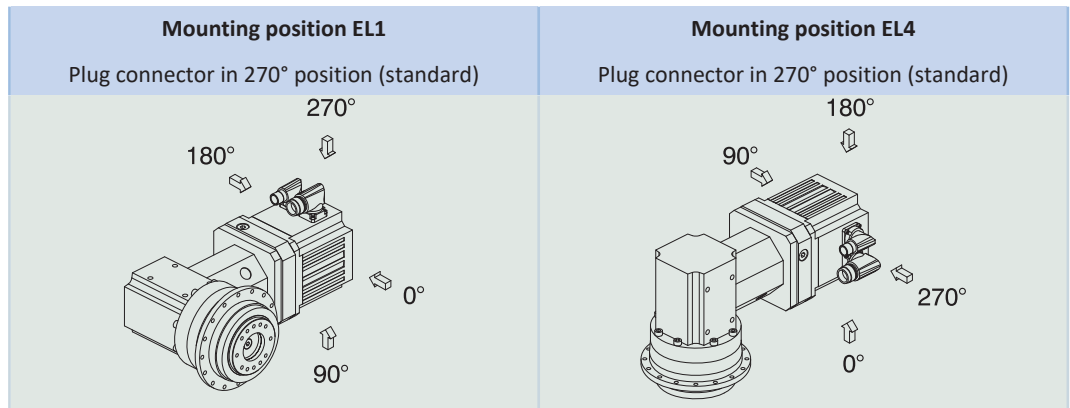


Indicate variations for your geared motor in the order.

Note that the plug connector position rotates along with the geared motor if the geared motor is in another mounting position.

12.5.6 Other product features

| Feature | Value |
|--|-----------------------|
| Max. permitted gear unit temperature (on the surface of the gear unit) | $\leq 90\text{ °C}$ |
| Paint | Black RAL 9005 |
| Explosion-proof design in accordance with (ATEX) Directive 2014/34/EU (optional) | Not available |
| Efficiency: | |
| η_{get} two-stage | 95% |
| η_{get} three-stage | 92% |
| Protection class: ¹ | |
| Gear unit | IP65 |
| Motor | IP56, optionally IP66 |

12.5.7 Direction of rotation

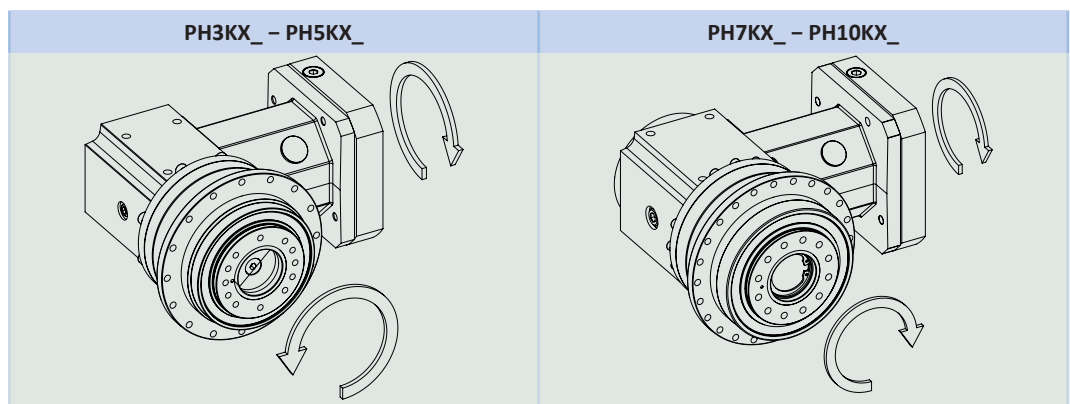

The pictures show mounting position EL1.

12.6 Project configuration

Project your drives using our SERVOnsoft designing software. Download SERVOnsoft for free at <https://www.stoeber.de/en/ServoSoft>.

It is the most convenient and reliable method of drive selection, as the entire torque/speed curve of the application is displayed and evaluated here in the curve of the geared motor.

In this chapter, only limit values for specific operating points can be taken into consideration for manual drive selection.


An explanation of the formula symbols can be found in Chapter [20.1](#).

¹ Observe the protection class of all the components.

The formula symbols for values actually present in the application are marked with *.

12.6.1 Drive selection

Drive selection for gear units

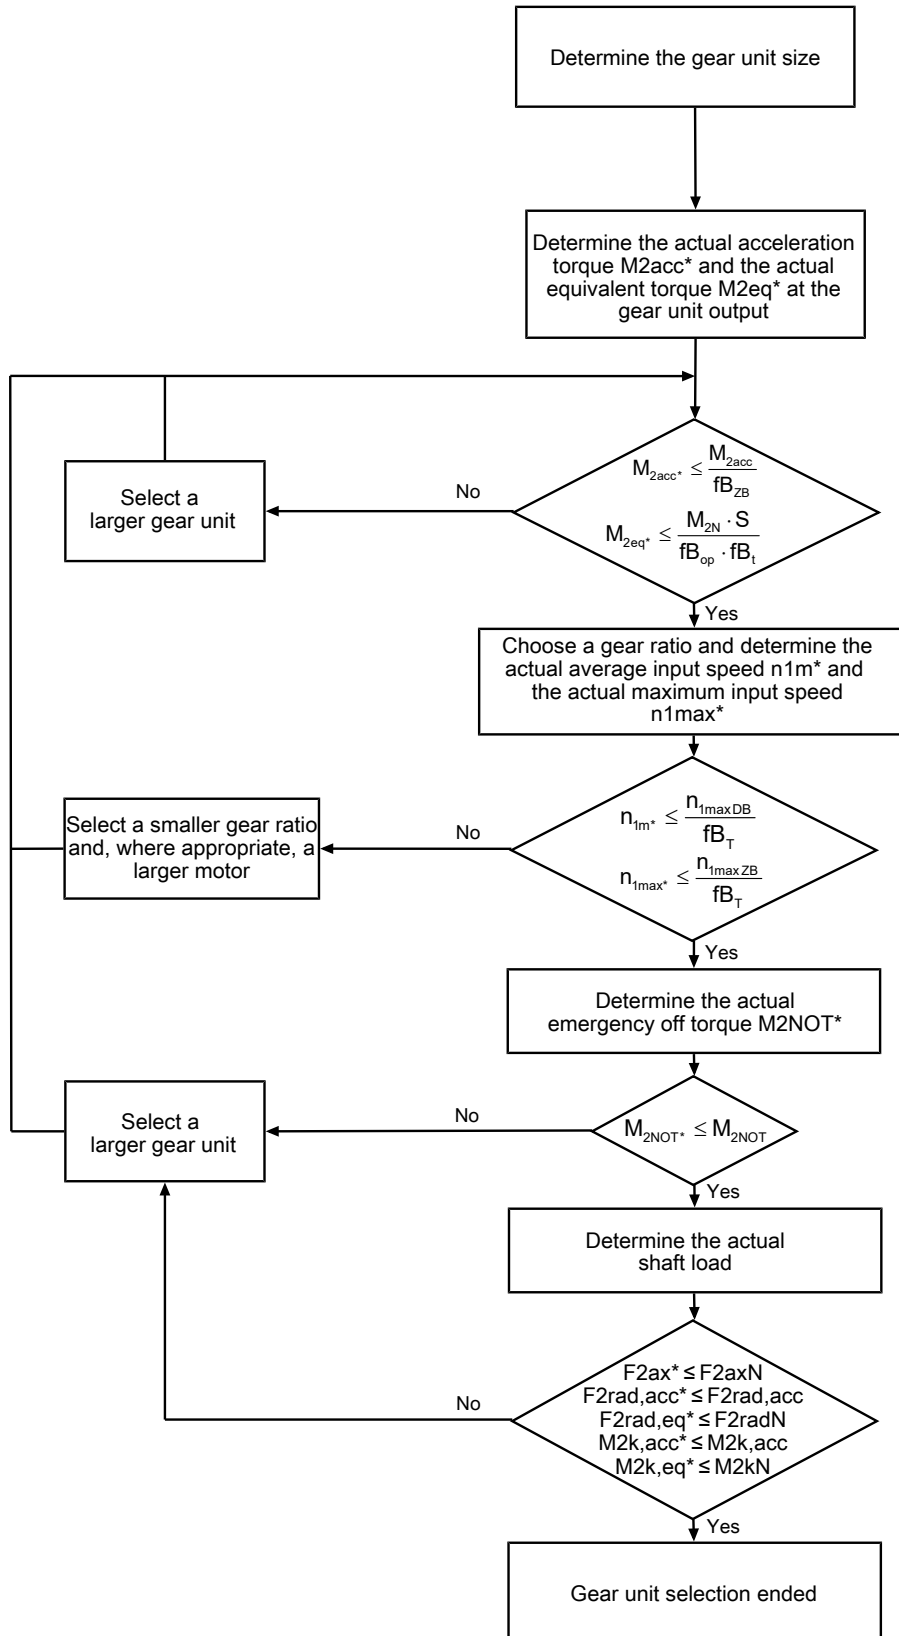


Calculate the forces and tilting torques in the chapter Permitted shaft loads.

Refer to the selection tables for the values for i , n_{1maxDB} , n_{1maxZB} , M_{2acc} (M_{2accHT} for reduced backlash), M_{2NOT} , M_{2N} and S .

The values for fB_T , fB_{op} , fB_t and fB_{ZB} can be found in the corresponding tables in this chapter.


Drive selection for motors

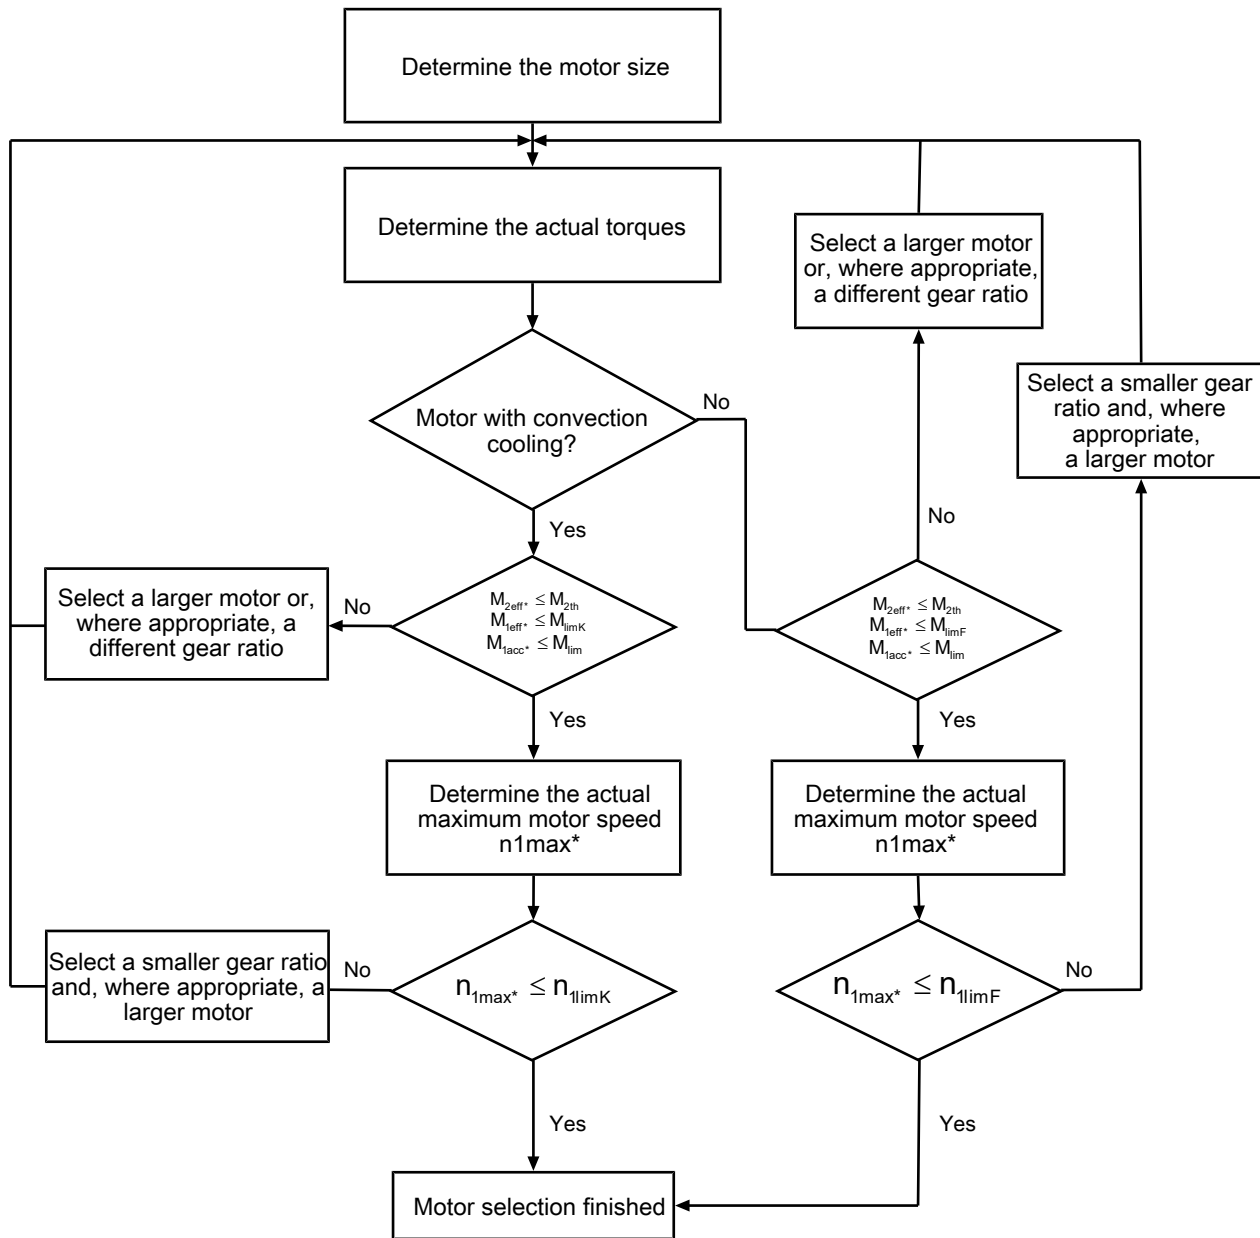

The value for M_{lim} , M_{limK} , M_{limF} , n_{limK} and n_{limF} can be found in the motor characteristic curve in the chapter [► 17.3]. Note the size, nominal speed n_N and cooling type of the motor.

Example of cyclic operation

The following calculations are based on a representation of the power taken from the output based in accordance with the following example:

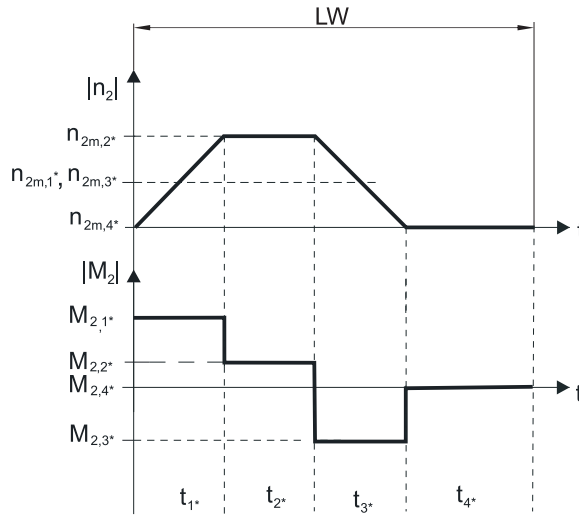**Calculation of the actual maximum acceleration torques**

$$M_{2acc^*} = J_{tot} \cdot \frac{\Delta n_2}{9,55 \cdot \Delta t} + M_{L^*}$$

$$M_{1acc^*} = \frac{M_{2acc^*}}{i \cdot \eta_{get}} + J_1 \cdot \frac{\Delta n_1}{9,55 \cdot \Delta t}$$

Calculation of the actual average input speed

$$n_{1m^*} = n_{2m^*} \cdot i$$

$$n_{2m^*} = \frac{|n_{2m,1^*}| \cdot t_{1^*} + \dots + |n_{2m,n^*}| \cdot t_{n^*}}{t_{1^*} + \dots + t_{n^*}}$$

If $t_{1^*} + \dots + t_{3^*} \geq 6$ min, calculate n_{2m^*} without the rest phase t_{4^*} .

The values for the ratio i can be found in the selection tables.

Calculation of the actual effective torque

$$M_{2eff^*} = \sqrt{\frac{t_{1^*} \cdot M_{2,1^*}^2 + \dots + t_{n^*} \cdot M_{2,n^*}^2}{t_{1^*} + \dots + t_{n^*}}}$$

Calculation of the actual emergency-off torque

$$M_{2NOT^*} = J_{tot} \cdot \frac{\Delta n_2}{9,55 \cdot \Delta t} + M_{L^*}$$

Calculation of the actual equivalent torque

$$M_{2eq^*} = \sqrt[3]{\frac{|n_{2m,1^*}| \cdot t_{1^*} \cdot M_{2,1^*}^3 + \dots + |n_{2m,n^*}| \cdot t_{n^*} \cdot M_{2,n^*}^3}{|n_{2m,1^*}| \cdot t_{1^*} + \dots + |n_{2m,n^*}| \cdot t_{n^*}}}$$

Calculation of the thermal limit torque

Calculate the thermal limit torque M_{2th} for a duty cycle $ED_{10} > 50\%$ and the actual average input speed n_{1m^*} .
(At $K_{mot,th} \leq 0$ you must reduce the average input speed n_{1m^*} accordingly or select another geared motor size.)


$$M_{2th} = M_{op} \cdot i \cdot K_{mot,th}$$

$$K_{mot,th} = 0,93 - \frac{a_{th}}{1000} \cdot a_{thEL} \cdot fB_T \cdot \left(\frac{n_{1m^*}}{1000} \right)^3$$

The values for i and a_{th} can be found in the selection tables.

The values for a_{thEL} and fB_T can be found in the corresponding tables in this chapter.

The value for the torque of the motor at operating point M_{op} with the determined average input speed n_{1m*} can be found in the motor characteristic curve in the chapter [\[17.3 \]](#). Note the size, nominal speed n_N and cooling type of the motor. The figure below shows an example of reading the torque M_{op} of a motor with convection cooling at the operating point.

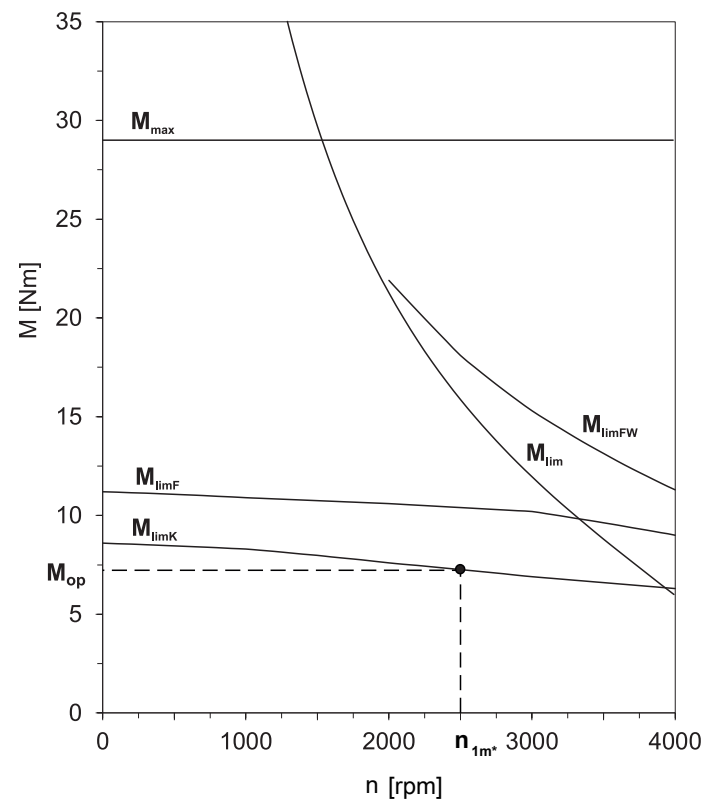

Operating factors

Parameter a_{thEL}

| Mounting position | a_{thEL} |
|-------------------|------------|
| EL1, 2, 5, 6 | 1.0 |
| EL3, 4 | 1.1 |

| Operating mode | fB_{op} |
|---------------------------------|-----------|
| Uniform continuous operation | 1.00 |
| Cyclic operation | 1.25 |
| Reversing load cyclic operation | 1.40 |

| Run time | fB_t |
|---------------------------|--------|
| Daily runtime ≤ 8 h | 1.00 |
| Daily runtime ≤ 16 h | 1.15 |
| Daily runtime ≤ 24 h | 1.20 |

| Cyclic operation | fB_{zB} |
|--------------------------------------|-----------|
| ≤ 1000 load changes/hour (LW/h) | 1.00 |
| > 1000 load changes/hour (LW/h) | 1.15 |

| Temperature | | f_{B_T} |
|-------------------------------|-----------------------------------|-----------|
| Motor cooling | Surrounding temperature | |
| Motor with forced ventilation | $\leq 20\text{ }^{\circ}\text{C}$ | 0.9 |
| | $\leq 30\text{ }^{\circ}\text{C}$ | 1.0 |
| | $\leq 40\text{ }^{\circ}\text{C}$ | 1.15 |
| Motor with convection cooling | $\leq 20\text{ }^{\circ}\text{C}$ | 1.0 |
| | $\leq 30\text{ }^{\circ}\text{C}$ | 1.1 |
| | $\leq 40\text{ }^{\circ}\text{C}$ | 1.25 |

Notes

- The maximum permitted gear unit temperature (see the "Other product features" chapter) must not be exceeded. Doing so may result in damage to the geared motor.
- For braking from full speed (for example when the power fails or when setting up the machine), note the permitted gear unit torques (M_{2acc} , M_{2NOT}) in the selection tables.

12.6.2 Permitted shaft loads for the output shaft

The values specified in the tables apply to the permitted shaft loads:

- For shaft dimensions in accordance with the catalog
- For output speeds $n_{2m^*} \leq 100\text{ rpm}$ ($F_{2axN} = F_{2ax100}$; $F_{2radN} = F_{2rad100}$; $M_{2kN} = M_{2k100}$)
- Only if radial forces on the gear unit are stabilized by its pilots (housing, flange shaft)

Permitted shaft loads for standard bearing S

| Type | z_2 [mm] | F_{2ax100} [N] | $F_{2rad100}$ [N] | $F_{2rad,acc}$ [N] | M_{2k100} [Nm] | $M_{2k,acc}$ [Nm] | C_{2k} [Nm/ arcmin] |
|------|---------------|---------------------|----------------------|-----------------------|---------------------|----------------------|-----------------------------|
| PH3 | 62.5 | 1650 | 1613 | 1613 | 101 | 101 | 75 |
| PH4 | 83.0 | 2150 | 3095 | 3571 | 257 | 296 | 192 |
| PH5 | 97.0 | 4150 | 4536 | 4897 | 440 | 475 | 429 |
| PH7 | 86.0 | 6150 | 17045 | 17045 | 1466 | 1466 | 500 |
| PH8 | 125.5 | 10050 | 27778 | 27778 | 3486 | 3486 | 1550 |
| PH9 | 155.0 | 33000 | 48387 | 70968 | 7500 | 11000 | 7500 |
| PH10 | 171.0 | 50000 | 51462 | 73099 | 8800 | 12500 | 9500 |

Permitted shaft loads for reinforced bearing V

| Type | z_2 [mm] | F_{2ax100} [N] | $F_{2rad100}$ [N] | $F_{2rad,acc}$ [N] | M_{2k100} [Nm] | $M_{2k,acc}$ [Nm] | C_{2k} [Nm/ arcmin] |
|------|---------------|---------------------|----------------------|-----------------------|---------------------|----------------------|-----------------------------|
| PH3 | 66.5 | 2200 | 2250 | 2250 | 150 | 150 | 80 |
| PH4 | 88.5 | 2900 | 4000 | 4000 | 354 | 354 | 217 |
| PH5 | 104.0 | 5000 | 5500 | 5500 | 572 | 572 | 478 |

For other output speeds, download diagrams at <https://configurator.stoeber.de/en-US/>.

The following applies to output speeds $n_{2m^*} > 100\text{ rpm}$:

$$F_{2axN} = \frac{F_{2ax100}}{\sqrt[3]{\frac{n_{2m^*}}{100\text{ rpm}}}} \quad F_{2radN} = \frac{F_{2rad100}}{\sqrt[3]{\frac{n_{2m^*}}{100\text{ rpm}}}} \quad M_{2kN} = \frac{M_{2k100}}{\sqrt[3]{\frac{n_{2m^*}}{100\text{ rpm}}}}$$

The values for F_{2ax100} , $F_{2rad100}$ and M_{2k100} can be found in the table "Permitted shaft loads" in this chapter.

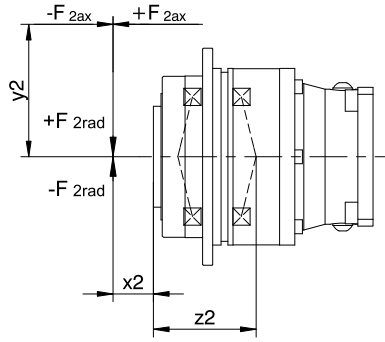


Fig. 1: Force application points

You can determine the permitted radial forces from the permitted tilting torque M_{2kN} and $M_{2k,acc}$. The actual radial forces may not exceed the permitted radial forces. The permitted radial forces pertain to the shaft end ($x_2 = 0$).

$$M_{2k,acc} = \frac{2 \cdot F_{2ax} \cdot y_2 + F_{2rad,acc} \cdot (x_2 + z_2)}{1000}$$

For applications with multiple axial and/or radial forces, you must add the forces as vectors.

In the event of EMERGENCY OFF operation (max. 1000 load changes), you can multiply the permitted forces and torques for F_{2ax100} , $F_{2rad100}$ and M_{2k100} by a factor of two.

Also note the calculation for equivalent values:

$$M_{2k,eq} = \sqrt[3]{\frac{|n_{2m,1}| \cdot t_{1*} \cdot |M_{2k,acc,1}|^3 + \dots + |n_{2m,n}| \cdot t_{n*} \cdot |M_{2k,acc,n}|^3}{|n_{2m,1}| \cdot t_{1*} + \dots + |n_{2m,n}| \cdot t_{n*}}}$$

$$F_{2rad,eq} = \sqrt[3]{\frac{|n_{2m,1}| \cdot t_{1*} \cdot |F_{2rad,acc,1}|^3 + \dots + |n_{2m,n}| \cdot t_{n*} \cdot |F_{2rad,acc,n}|^3}{|n_{2m,1}| \cdot t_{1*} + \dots + |n_{2m,n}| \cdot t_{n*}}}$$

The following apply to the bearing service life L_{10h} ($ED_{10} \leq 40\%$):

$L_{10h} > 10000$ h with $1 < M_{2kN}/M_{2k*} < 1.25$

$L_{10h} > 20000$ h with $1.25 < M_{2kN}/M_{2k*} < 1.5$

$L_{10h} > 30000$ h with $1.5 < M_{2kN}/M_{2k*}$

For different duty cycles:

$$L_{10h} > L_{10h(ED_{10}=40\%)} \cdot \frac{40\%}{ED_{10}}$$

12.6.3 Recommendation for radial shaft seal rings

For a duty cycle $> 60\%$ and higher surrounding temperatures, we recommend radial shaft seal rings made of FKM at the output.

Properties:

- Excellent temperature resistance
- High chemical stability
- Very good resistance to aging
- Excellent resistance in oils and greases
- For use in the food, beverage and pharmaceutical industries

Leak-proofness


Our gear units are equipped with high-quality radial shaft seal rings and checked for leaks. However, a leak cannot be fully ruled out over the length of use of a gear unit. If you use a gear unit with goods incompatible with the lubricant, you must take measures to prevent direct contact with the gear unit lubricant in case of a leak.

12.6.4 Reverse operation

To ensure lubrication for circulating gearing parts during cyclic reverse operation from $\pm 20^\circ$ to $\pm 90^\circ$ at the output, pay careful attention to the position of the output shaft for the horizontal mounting of the gear unit, as shown in the diagrams below.

The images show the center position of reverse operation.

Cyclic reverse operation $\leq \pm 20^\circ$ on request.

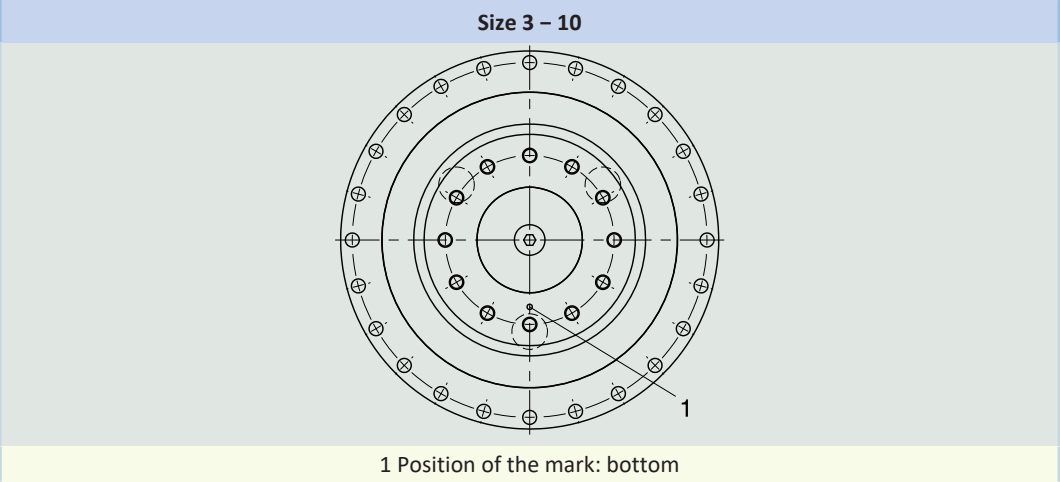

Please note that the hole pattern may be different, depending on the size of the planetary gear unit.

12.7 Additional documentation

Additional documentation related to the product can be found at

<http://www.stoeber.de/en/downloads/>

Enter the ID of the documentation in the Search term field.

| Documentation | ID |
|--|-----------|
| Operating manual gear units, geared motors PH33KX – PH83KX, PH94KX – PH104KX | 443359_en |